AUTOMATIC COILING AND BINDING SYSTEMS WBA 400

HIGH-SPEED COIL + BINDING MACHINE

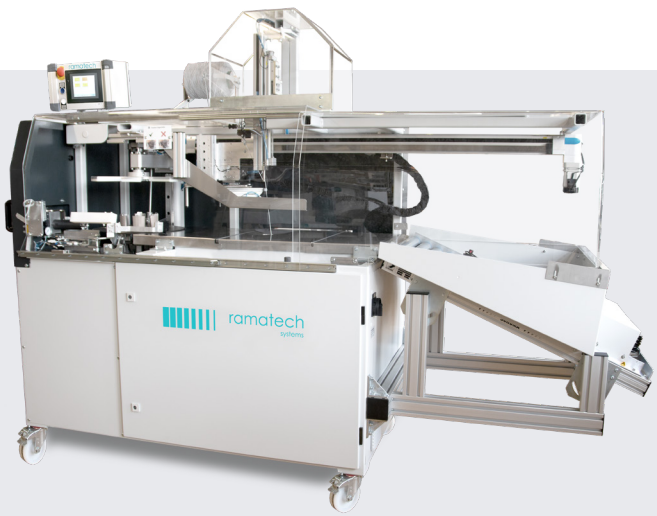

FEATURES

- Automatic binding station for elastic rubber cord, always with two bindings
- Threading of the cable beginning is conducted fully automatically in combination with a cable processing machine
- The coiler is equipped with a servomotor
- Only for cable coils - no spools

TECHNICAL DATA

Performance	WBA 400	WBA 220
Coil outer diameter	approx. 150 mm	approx. 120 mm
Coil inner diameter	max. 380 mm	max. 220 mm
Cable coil height	max. 70 mm	max. 70 mm
Free cable ends with length of	approx. circumference/2 ± 100 mm (e.g.: coil diameter of 130 mm > circumference = 404 mm > free cable ends each approx. 202 mm ± ca. 100 mm)	approx. circumference/2 ± 100 mm (e.g.: coil diameter of 130 mm > circumference = 404 mm > free cable ends each approx. 202 mm ± ca. 100 mm)
Cable length	from 1.5 - 50 m / for coiling min. 1.5 m length (bigger than 50 m length only up to cable diameter about max. 10 mm - (bigger cable diamter on request / cable samples required)	from 1.5 - 50 m / for coiling min. 1.5 m length (bigger than 50 m length only up to cable diameter about max. 10 mm - (bigger cable diamter on request / cable samples required)
Cable diameter	min. 4 to max. 12 mm (bigger cable diamter on request / cable samples required)	min. 4 to max. 12 mm (bigger cable diamter on request / cable samples required)
Voltage	3 x 400 (± 10 %) VAC / N / PE	3 x 400 (± 10 %) VAC / N / PE
Frequency	50 Hz (± 4 %)	50 Hz (± 4 %)
Power	min. 20 AT	min. 20 AT
Air pressure	min. 6 bar	min. 6 bar
Dimensions (L x W x H)	2.8 m x 1.0 m x 1.8 m	2.2 m x 1.0 m x 1.8 m

LOCATION SWITZERLAND

Ramatech Systems AG . Hohenrainstrasse 36 . CH - 6280 Hochdorf
Phone: +41 41 914 26 26 . E-Mail: info@ramatech.ch

LOCATION GERMANY

Ramatech Systems GmbH. Messerschmittstraße 30 . D - 89231 Neu-Ulm
Phone: +49 731 40 199 200 . E-Mail: info@ramatech.de

© Ramatech systems 2021